


"V" Pot Gas Fryer

Model CS-VF50

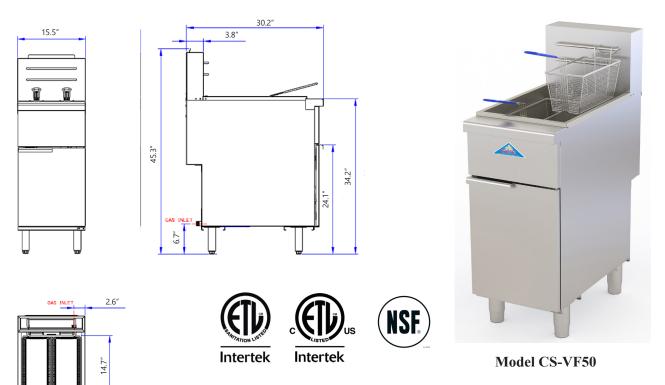

Model	Gas Type	Total BTU	Oil Capacity	Overall Dimensions	Net Weight	Package Size	Shipping
CS-VF50	Natural Gas	122,000	50-60 lbs.	15 5"x 30.2"x 45.3"	145 lbs.	16.6"x 32.3"x 33.5"	163 lbs.

Standard Features

- Open pot structure, CS-VF50 model at 50 lbs capacity
- Snap action millivolt control behind the door, this is a gas five and doesn't require electric connections

Model CS-VF50 Top Basket View

- The temperature control range 200°F-400°F
- Four stainless steel adjustable legs
- Large cold zone. Captures and holds particles out of the heating zone, reduces taste transfer
- Twin baskets with plastic coated handle
- 1 -1/4" full port drain valve for fast and complete oil draining

- This appliance is manufactured for commercial installation only, not intended for home use.
- ¾" NPT rear gas connections
- Supply gas pressure not to exceed 14" W.C. (1/2 PSI)
- \bullet Natural gas operating pressure 4.0" W.C, Recommended supply pressure 7-9" W.C
- \bullet Propane gas operating pressure 10.0'' W.C, Recommended supply pressure 11-12" W.C
- Requires a 6" clearance at both side and rear adjacent to combustible construction
- Unit are not supplied with conversion kits, select gas type before ordering

NOTICE: In an ongoing effort of product development & improvement, Comstock-Castle reserves the right to change specifications and product design without notice. Such modifications do not entitle the buyer to corresponding changes or replacements for previously purchased equipment.



• Quincy, IL. 62301 www.castlestove.com

